

## PCBA REPLACEMENT KIT 629097838 - 548000143

This kit provides instructions for replacement of the main PCB.

### 1.0 PCBA Replacement

- 1) Shut off power to the Nitropro Mini and unplug its power cord from the wall receptacle.
- 2) Remove the drip tray and splash plate.
- 3) Remove the Phillips screw securing the metal housing of the Main PCB (Fig. 1).
- 4) Withdraw the Main PCB from the unit and unplug its three wiring connectors.
- 5) Replace and secure new PC board/mounting plate assembly in the unit with the supplied screw.
6. Setup the mix-ratio select switches by following the procedure in the install manual or section 4.3.3 of the service manual.



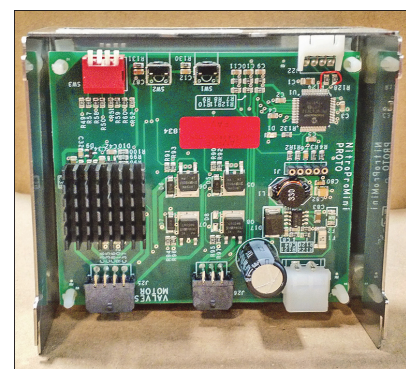


Figure 1 - Main PCB Removal

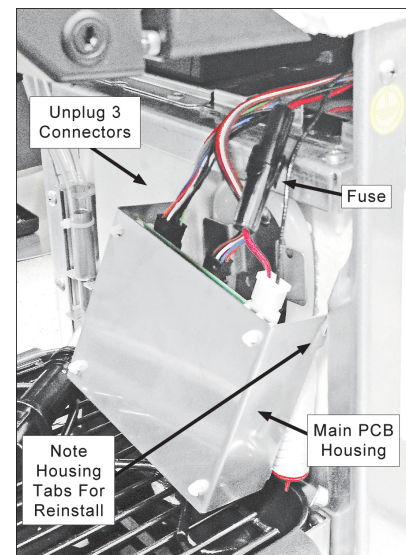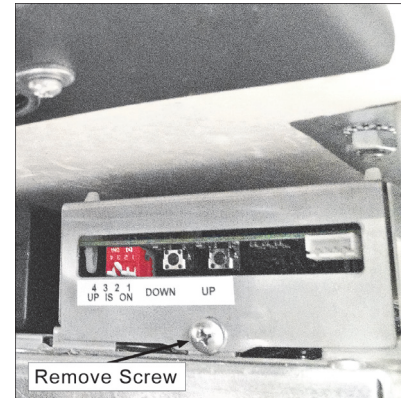

---

PCBA REPLACEMENT KIT 629097838 - 548000143