

CG14G-2TP/2TF DUAL LID CONTACT GRILL

DUAL LID CONTACT GRILL:

Prince Castle's dual lid contact grill has two heated platens that consistently cook a variety of products from top and bottom. Each platen's temperature is independently regulated/maintained by solid state controller and four zone probe monitoring.

With two four-channel electronic, programmable timers, the Prince Castle contact grill incorporates an audible alarm to supervise and remind operators to check or remove products.

The CG14G-2TP contact grill has a cool exterior base surface and upper platen guards provide added protection from the top heated surfaces during operation. Platen temperature set points are pre-programmed specific to requirements, with built-in set point adjustment protection. Removing product build-up is simple with removable catch/drip tray.

Adjustable four position lid stops are also designed specifically for menu items and include closed set point position for daily cleaning.




CG14G-2TP/2TF

STANDARD FEATURES:

- Solid state controls provide accurate temperature control
- Cooking surface is 14" wide
- Cooking surface temperature range = 250°F (79°C) to 550°F (302°C)
- Durable stainless steel construction and heavy duty platens ensure long life and reliability
- Dual four channel electronic, programmable timers to track product grill times
- Adjustable four position lid stops provide consistent grilling of menu items and adjustment for cleaning
- "Slide in, Slide out" control board feature allows for menu changes through accessible USB port and quick change out during any required service replacement
- Easy to clean - grease drawer accessible from front
- Separate Accessory: 233-71AG grill wiper allows for consistent cleaning of grooved surfaces
- One year parts and labor warranty



"Slide in, Slide out" control board feature

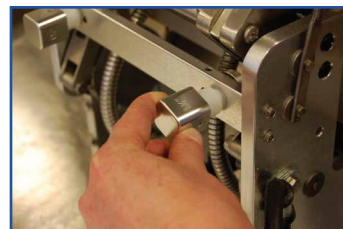

Adjustable lid stops for each upper platen




233-71AG grill wiper accessory for cleaning

CG14G-2TP/2TF DUAL LID CONTACT GRILL

SPECIFICATIONS

LAYOUT:

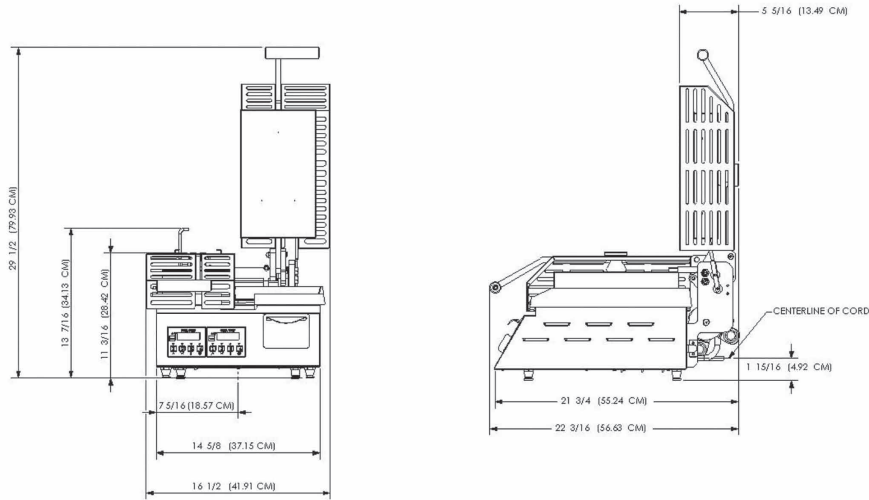

Designs and specifications are subject to change without notice.

DIMENSIONS:

Model Number	Width in (cm)	Height in (cm)	Depth in (cm)	Shipping Weight lb (kg)	Shipping cu.ft. (cu.m.)
CG14G-2TP (Closed)	16.50 (41.90)	11.20 (28.40)	22.20 (56.60)	77.00 (35.00)	7.00 (.175)
CG14G-2TP (Open)	16.50 (41.90)	29.50 (79.90)	22.20 (56.60)	77.00 (35.00)	7.00 (.175)

ELECTRICAL:

Model Number	Volts	Hz	Watts	Plug
CG14G-2TP	208-240	50/60	2600	NEMA 6-20P

Note: CG14G-2TF is identical to CG14G-2TP, except without plug.