

**CG8 SERIES SINGLE LID CONTACT GRILL**



CG8

**SINGLE LID CONTACT GRILL:**

Prince Castle's single lid contact grill has two heated platens that consistently cook a variety of products from top and bottom. Each platen's temperature is independently regulated/maintained by solid state controller and zone probe monitoring.

With single-channel electronic, programmable timers, the Prince Castle contact grill incorporates an audible alarm to supervise and remind operators to check or remove products.

The CG8 contact grill has a cool exterior base surface and upper platen guards provide added protection from the top heated surfaces during operation. Platen temperature set points can be pre-programmed specific to customer's requirements, with built-in set point adjustment protection. Removing product build-up is simple with removable catch / drip tray.

Adjustable four position lid stops are designed for different menu items and include closed position set point for daily cleaning.

**STANDARD FEATURES:**

- Accurate temperature control
- Cooking surface is 8" wide smaller foot print (12" X 22" )
- Cooking surface temperature range = 270°F ( 132°C ) to 550°F ( 288°C )
- Durable stainless steel construction and heavy duty platens ensure long life and reliability
- Electronic , programmable timers to track product grill times
- Adjustable four position lid stops provide consistent grilling of menu items
- Cleaning mode designed,
- Grease drawer accessible from front
- Energy saving
- One year parts and labor warranty



Adjustable lid stops for upper platen



Cleaning wiper(Optional)



Platen with groove




Non-Stick Teflon kit(Optional)

## CG8 SERIES SINGLE LID CONTACT GRILL

### SPECIFICATIONS

#### LAYOUT:

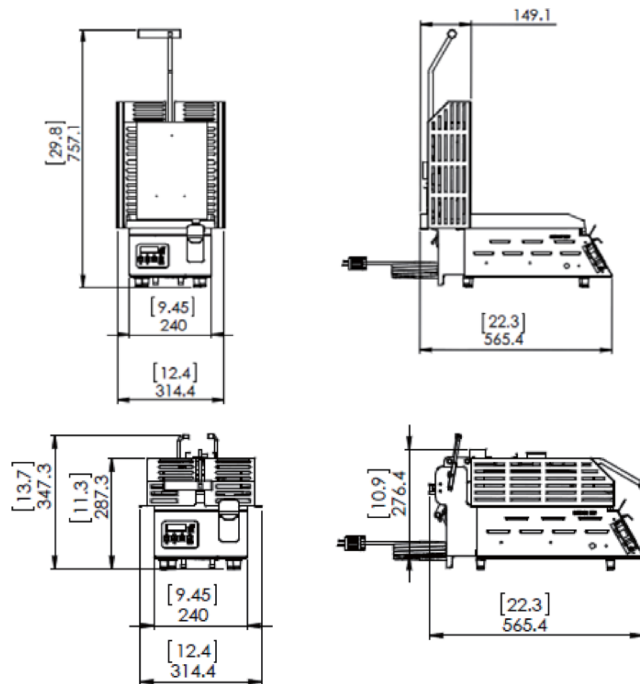

Designs and specifications are subject to change without notice

#### DIMENSIONS:

Model Number	Width in(cm)	Height in(cm)	Depth in(cm)	Shipping Weight lb(kg)	Shipping cu.ft.(cu.m.)
CG8 (Closed)	12.40(31.44)	13.70(34.73)	22.30(56.54)	57.20(26.00)	5.40(.135)
CG8 (Open)	12.40(31.44)	29.80(75.71)	22.30(56.54)	57.20(26.00)	5.40(.135)

#### ELECTRICAL:

Model Number	Volts	Hz	Watts	Plug	Platen surface
CG8-1TP	230	50/60	1300	NEMA 6-20P	FLAT
CG8-1TPUL	230	50/60	1300	No plug	FLAT
CG8-1TPK	230	50/60	1300	16A 3 PIN(GB2099)	FLAT
CG8-F-GMCN`	230	50/60	2000	16A 3 PIN(GB2099)	FLAT
CG8-G-SWCN	230	50/60	1400	16A 3 PIN(GB2099)	GROOVE W/ Teflon
CG8-F-GMCNT`	230	50/60	2000	16A 3 PIN(GB2099)	FLAT W/ Teflon
CG8-F-HLSCN	230	50/60	2000	16A 3 PIN(GB2099)	FLAT W/ Teflon
CG8-G-SWAU	230	50/60	1400	250V 10A 3 PIN	FLAT W/ Teflon

#### CERTIFICATION:



2019/05